

Product Information ISO Class 3 – 5 Cleanroom Class 1 – 100 EU Grade B/C/D

UltraSeal[®] 3000

Sealed Edge Cleanroom Laundered 100% Polyester Knit wiper

UltraSeal® 3000 is a high sorbency, tubular, sealed edge cleanroom laundered two-ply wiper required for ISO Class 3 and above environments composed of 100% continuous filament polyester knit fabric.

These properties provide UltraSeal® 3000 with the highest level of cleanliness, abrasion resistance and chemical compatibility required for ISO Class 3 and above environments and applications requiring

critical control of contaminants combined with superior performance. UltraSeal® 3000 provides excellent cleaning effectiveness in tough applications due to patented edge seal and pinsonic design.



Other Class 3 and above wipers

- MicroSeal SuperSorb®
- MicroSeal®1200
- MicroSeal®VP
- ValuSeal^{®-}LP
- ValuSeal®-HA
- ValuSeal®1500

Key Attributes

- 100% continuous filament polyester knit
- Two-ply pinsonic tubular construction
- Patented sealed edge process for reduced fiber contamination; Patent #5,229,181
- Laundered and packaged in Berkshire's ISO Class 4 cleanroom

Benefits

•

- Critically low particles, fibers, ions and extractables
- Chemically compatible with IPA, Acetone and other solvents
- High sorbency level
- Pinsonic design adds surface texture that aids in stubborn residue removal •
- Patented sealed edge process combined with tubular design offers excellent abrasion resistance for the toughest cleaning applications

Environmental

Complies with RoHS

Applications

- Designed for use in ISO Class 3 and higher cleanroom environments
- Designed for the highest level of contamination control in critical processing applications
- Excellent for spill control and processing areas where sorbency is of importance
- Chamber cleaning and CMP processing
- Designed for removal of tough residues in critical applications
- Steam autoclavable for aseptic applications
- Cleaning of medical device products
- Removing cleaning and disinfecting solutions

Value Pack Option

The value pack option provides the same great performance in a more economical bulk packaging format.

Pre-Wetted Option

The same wiper material can be provided in pre-wetted formats for reduced VOC emissions, increased convenience, increased productivity, improved solvent control and cleaning protocol repeatability and reduced costs.

Sterile Validated Option

For aseptic processing areas, the same wiper material can be provided in a gamma irradiated validated sterile to a 10⁻⁶

www.berkshire.eu.com Contact: Tel 44 (0) 870 757 2877 enquiries@berkshire.uk.com	America	Tel 1 413 528 2602	Fax 1 413 528 2614	info@berkshire.com
	Europe	Tel 44 (0) 870 757 2877	Fax 44 (0) 870 757 2878	enquiries@berkshire.uk.com
	SE Asia	Tel 65 6252 4313	Fax 65 6252 4312	enquiries@berkshire.com.sg
	Japan	Tel 81 3 5827 2380	Fax 81 3 5827 2382	master@berkshire.co.jp



Technical Data:

Attribute		Units	Value	Test Method
Basis Weight		g/m ²	145	TAPPI T-410
Caliper		μm	418	TAPPI T-411
Fibers	≥100µm	fibers/cm ²	0.032	IEST-RP-CC004.3, Sec 6.1.3 / Sec 6.2.2
Particles	<u>≥</u> 0.5µm	x10 ³ /cm ²	0.71	IEST-RP-CC004.3, Sec 6.1.3 / Sec 6.2.1
Sorbency	Capacity	mL/m²	418	IEST-RP-CC004.3, Sec 8.1 modified / Sec 8.2 modified
	Efficiency	mL/g	2.9	
	Rate	seconds	1	
Non-Volatile Residue	DI Water	g/m²	0.0039	IEST-RP-CC004.3, Sec 7.1.2
	IPA	g/m ²	0.021	
Ions	Na ⁺	ppm	0.014	IEST-RP-CC004.3, Sec 7.2.2
	K+	ppm	0.081	
	Ca++	ppm	0.012	
	Mg ⁺⁺	ppm	0.0037	
	CI	ppm	0.044	


Notes:

• Technical data represented in this table are typical values at the time of publication. These should not be used as product specifications.

Due to differences in test methods applied and equipment utilized by different wiper manufacturers, valid product comparisons may only be obtained through side-by-side testing in the same test facility, under similar conditions
Third party testing can be performed upon request

Order Information:

Product	Number	Size	Shts/pk	Pks/cs	Style
UltraSeal [®] 3000	US3000.0909.8	9x9" (23x23cm)	100	8	Stacked

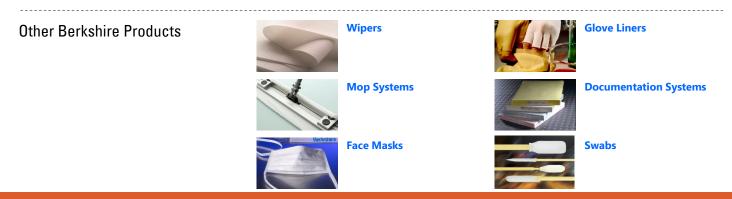

www.berkshire.eu.com

Contact: Tel 44 (0) 870 757 2877 / enquiries@berkshire.uk.com

BII_3150_08-2019